

ALUPROFI PLEXI 40



AVAILABLE FOR:

AM CONTROLLER SYSTEM
RF HF MONO SYSTEM
RF NG MONO SYSTEM
RF EASYDET DUAL SYSTEM
RF NG DUAL SYSTEM


OPTIONS AND FEATURES:

RGB LED alarm light
85 dB piezo
Inbuilt Visitor Counter (optional)
Inbuilt METALSPY loop (RF)
Available in silver, black, white or customized color

REFERENCES



TECHNICAL SPECIFICATIONS

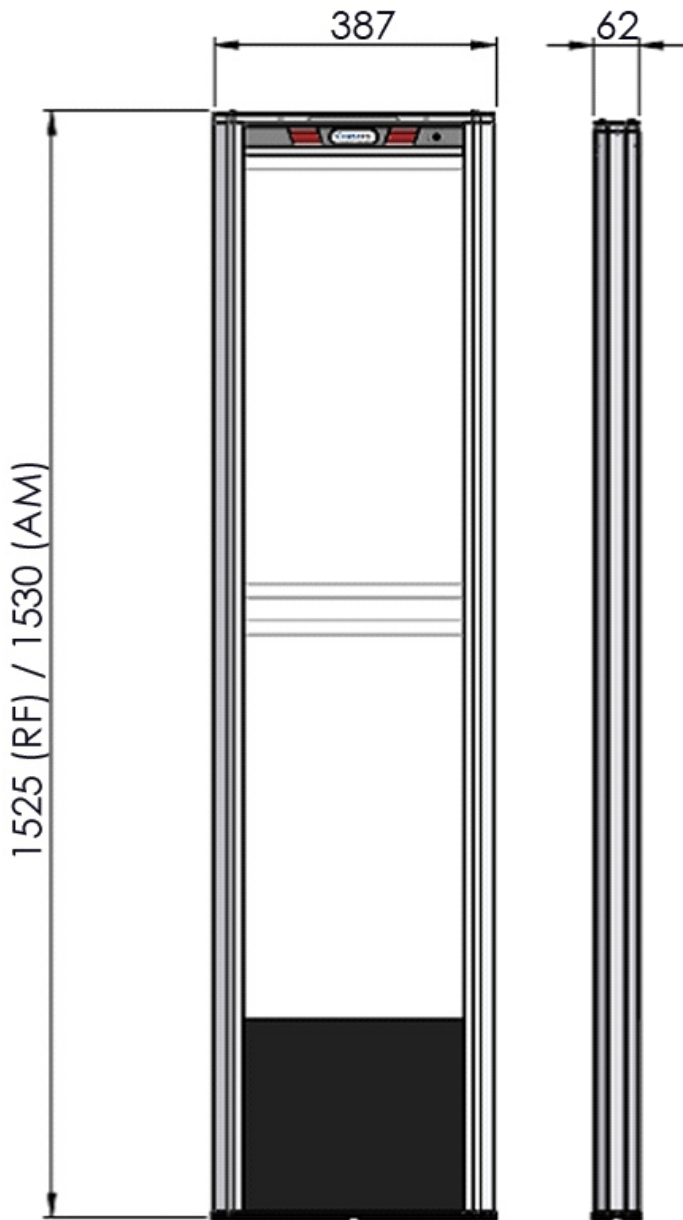

DIMENSIONS:


Height RF:	1525 mm
Height AM:	1530 mm
Width:	387 mm
Depth:	62 mm
Weight:	8,3 kg
Base:	389x64 mm
Advertising area (visible):	N/A

AM TECHNICAL SPECIFICATIONS:

Input:	110-220 V AC, 50-60 Hz
Consumption:	60 W
Center Frequency:	58 kHz
Sweep Range:	±200 Hz

RF TECHNICAL SPECIFICATIONS:

Input:	15 VAC (HF MONO)
	18 VAC (NG MONO)
	24 VDC (DUAL SYSTEMS)
Consumption:	max 9W/max 12W/max 25 W
Center Frequency:	1.81 MHz – 10.5 MHz
Sweep Range:	± 600 kHz HF MONO
	± 800 kHz NG MONO
	± 600 kHz DUAL SYSTEMS

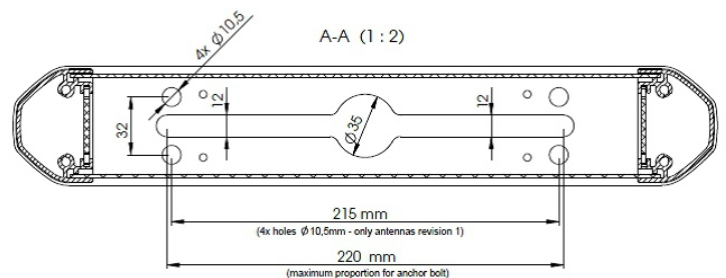

PERFORMANCE

AM DR LABEL
AM AMERSEC® PENCIL TAG
AM AMERSEC® RAMBO TAG

RF 4x4 cm 8.2 MHz, deactivatable
RF 5x5 cm 8.2 MHz, deactivatable
RF AMERSEC® PICCO TAG

EACH SIDE (MONO)

up to 90 cm
up to 120 cm
up to 140 cm

up to 80 cm
up to 100 cm
up to 120 cm

BETWEEN PEDESTALS (DUAL)

up to 190 cm
up to 240 cm
up to 280 cm

up to 160 cm
up to 180 cm
up to 210 cm

Tested in all orientations, depending on environment