

AM CLASSIC 30, AM CLASSIC 30X AM CLASSIC ADVERT

AM CONTROLLER UNIT PEDESTALS

Full-featured, powerful AM (Acousto-Magnetic) system designed with a focus on strong detection of adhesive labels, reliability, and flexibility. The multi-pedestal AM Controller is an NG (Next Generation) product line that is suitable for any environment, with a performance that ranks at the top of the retail security market.

The AM Controller combined with the CLASSIC 30 pedestals prove that an economical solution does not mean sacrificing performance or quality. The slim and space-saving design is ideal for stores that require only tag detection, without additional integrated features.

The CLASSIC 30 can be used as an advertising panel, or it can be installed as a transparent pedestal (CLASSIC 30X). It can also be connected to the StoreMonitor cloud or upgraded with wireless communication for easy data collection and maximum security.

STOREMONITOR COMPATIBLE 

Features & options:

- Remote maintenance and diagnostics
- Wireless communication
- StoreMonitor connectivity
- Advertisement panel
- Power saving mode
- Additional alarm outputs
- Jammer detector
- Up to 6 pedestals powered with 1 Controller unit





Remote connectivity with our eComm module ensures that our systems are not only easy to install but can also be serviced and maintained remotely with fast response and without unnecessary travel costs.



On top of remote connectivity our CONTROLLER UNIT based system now features **wireless in-store communication** which makes the installation and maintenance of the system very flexible and cost effective. Setting up and adjusting our system has never been easier or faster.



An **advertisement** panel on your security system can be an additional sales tool with our “easy slide” access to printed banner replacement. An identical pedestal but without the opaque panel, the Classic X pedestal features a transparent acrylic surface that blends in with the surrounding space.




Our Classic line of pedestals are available in three standard colors (silver, black, and white) as well as three stylish options. The standard Classic pedestal is a lightweight, open design with a slim footprint and LED alarm lights. If a closed pedestal is preferred, an acrylic panel may be added which maintains the same transparent visual appeal. The third option is an opaque panel in one of our standard colors.

Design comparison

PEDESTAL COMPARISON	CLASSIC 30	CLASSIC 30X	CLASSIC 30 ADVERT
FEATURES / OPTIONS			
ADVERTISEMENT PANEL	✗	✗	✓
INTEGRATED METAL AND MAGNET DETECTION ^{3,6}	✗	✗	✗
INTEGRATED VISITOR COUNTING ^{3,5}	✗	✗	✗
SMART DIRECTIONAL ALARMS ^{3,4}	○	○	○
REMOTE MAINTENANCE AND DIAGNOSTICS ⁵	○	○	○
WIRELESS COMMUNICATION	○	○	○
POWER SAVING MODE	✓	✓	✓
COLOUR OPTIONS	S / B / W	S / B / W	S / B / W
DIMENSIONS			
HEIGHT	152.5 cm	152.5 cm	152.5 cm
WIDTH	29.4 cm	29.4 cm	29.4 cm
DEPTH	5.2 cm	5.2 cm	5.2 cm
ADVERTISEMENT PANEL (H × W)	✗	✗	148.7 x 24.4 cm
WEIGHT	7.4 kg	7.05 kg	8.05 kg
DETECTION RANGE			
DETECTION RANGE SOFT LABELS ¹	MONO / DUAL	MONO / DUAL	MONO / DUAL
	up to 110 / 200 cm	up to 90 / 180 cm	up to 90 / 180 cm
DETECTION RANGE HARD TAG ²	MONO / DUAL	MONO / DUAL	MONO / DUAL
	up to 130 / 260 cm	up to 130 / 260 cm	up to 130 / 260 cm
PRODUCT CODES:	AS-30CLS	AS-30CLXS	AS-30CLS-AD

AM Controller Unit

PRODUCT CODE: AS-CUV2

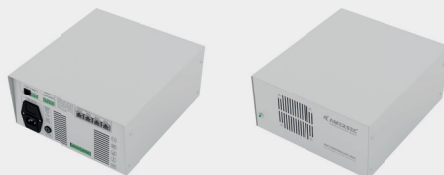

DIMENSIONS (H×W×D) 13.0 × 26.3 × 29.6 cm
WEIGHT 6.7 kg

Legend: ✓ included ✗ not available ○ optional.

¹tested with original DR labels in all orientations. ²tested with original AMERSEC® pencil tags in all orientations. ³minimum of 2 pedestals required.

⁴visitor counting sensors required. ⁵e-COMM communication module required with a Storemonitor account. ⁶MMS Controller unit required.

System specification

Operating frequency – 58 kHz

Power – 110–240 V, 50–60 Hz

Consumption – 120 W

